




# VERTI-DRAIN

0  
1  
2  
3




The Verti-Drain Mustang 7110 is a fast Verti-Drain with a working width of 40" (1.0m), penetrating up to 6" (150 mm) deep. The tines can be adjusted to the vertical position for hollow coring, or to the 'kick' position for solid tine use. It is a simplified Verti-Drain model, containing a one-speed gearbox, and considerably less weight (approx 725 lbs/330kgs) allowing for use of a 13-15 hp tractor. The 7110 is supplied without a rear roller.

# VERTI-DRAIN 7110



Verti-Drains adjustable parallelogram design shatters the soil, and also allows for clean Coring, on all models.

The slick Verti-Drain Mustang 7110 has a weight of only 725 lbs (330 kilos), and fits to tractors as small as 13HP. Tine depth and tine angles can be set quickly and accurately using a simple handle or lever.

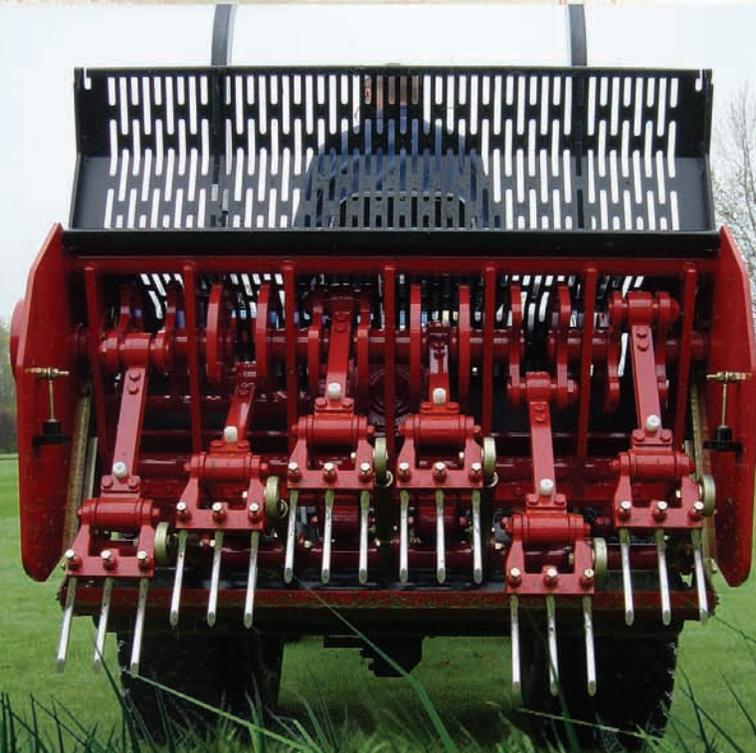

## WORKING SPECIFICATIONS

Working width	40" (1.0 m)
Weight	725 lbs (330 kgs)
Working depth	6" (150 mm)
Hole spacing side-to-side	2" (55 mm)
Hole spacing forward @ 500rpm	
Spacing 2 1/8" (55 mm)	1.25 mph (2 kmh)
Spacing 3 1/2" (90 mm)	2 mph (3.2 kmh)
Spacing 5" (125 mm)	2.7mph (4.3 kmh)
Recommended tractor size	13 hp
Capacity (maximum)	
Spacing 2 1/8" (55 mm)	21,950 sq ft/h (2,040 sq m/h)
Spacing 3 1/2" (90 mm)	34,755 sq ft/h (3,230 sq m/h)
Spacing 5" (125 mm)	47,129 sq ft/h (4,380 sq m/h)
Options	Solid tines from 3/16" x 5" (5mm x 125mm) to 1/2" x 6" (12mm x 150mm) Hollow tines from 3/8" x 5" (10mm x 125mm) to 3/4" x 6" (18mm x 150mm) Turf hold down fingers Windrow kit Rear Roller

## FEATURES / BENEFITS

FEATURE	BENEFIT
fast working speed	higher productivity
requires only 13hp	can be used with smaller tractors
weighs only 725 lbs (330 kg)	less lift capacity needed
one speed gear box	simple to use
six inch working depth	deeper than the competition
variety of tines	more versatile machine

## CALL FOR YOUR FREE DEMO TODAY!

The market leading range of Verti-Drains have outsold and outperformed all competitors for the past twenty years. With a model to suit virtually every application, it's the widest range available anywhere.

Our commitment is to fully satisfy the needs of our customer. For immediate assistance, contact your local distributor or our Sales & Marketing Office at 636-326-1009.



**Redexim**  
NORTH AMERICA, INC.  
Redexim North America Inc.  
29 Cassens Court  
Fenton, MO 63026, USA  
Tel: 636-326-1009  
Fax: 636-326-4884  
www.redexim.com  
E-mail: redexim@aol.com